

ESTIC


高速度

低重心

小型化

Handy 2000 Series 高速拧紧轴

EH2-R4002-SC / EH2-R0005-SC / EH2-R0010-SC /
EH2-R2025-SL / EH2-R3050-SC / EH2-R3080-SC

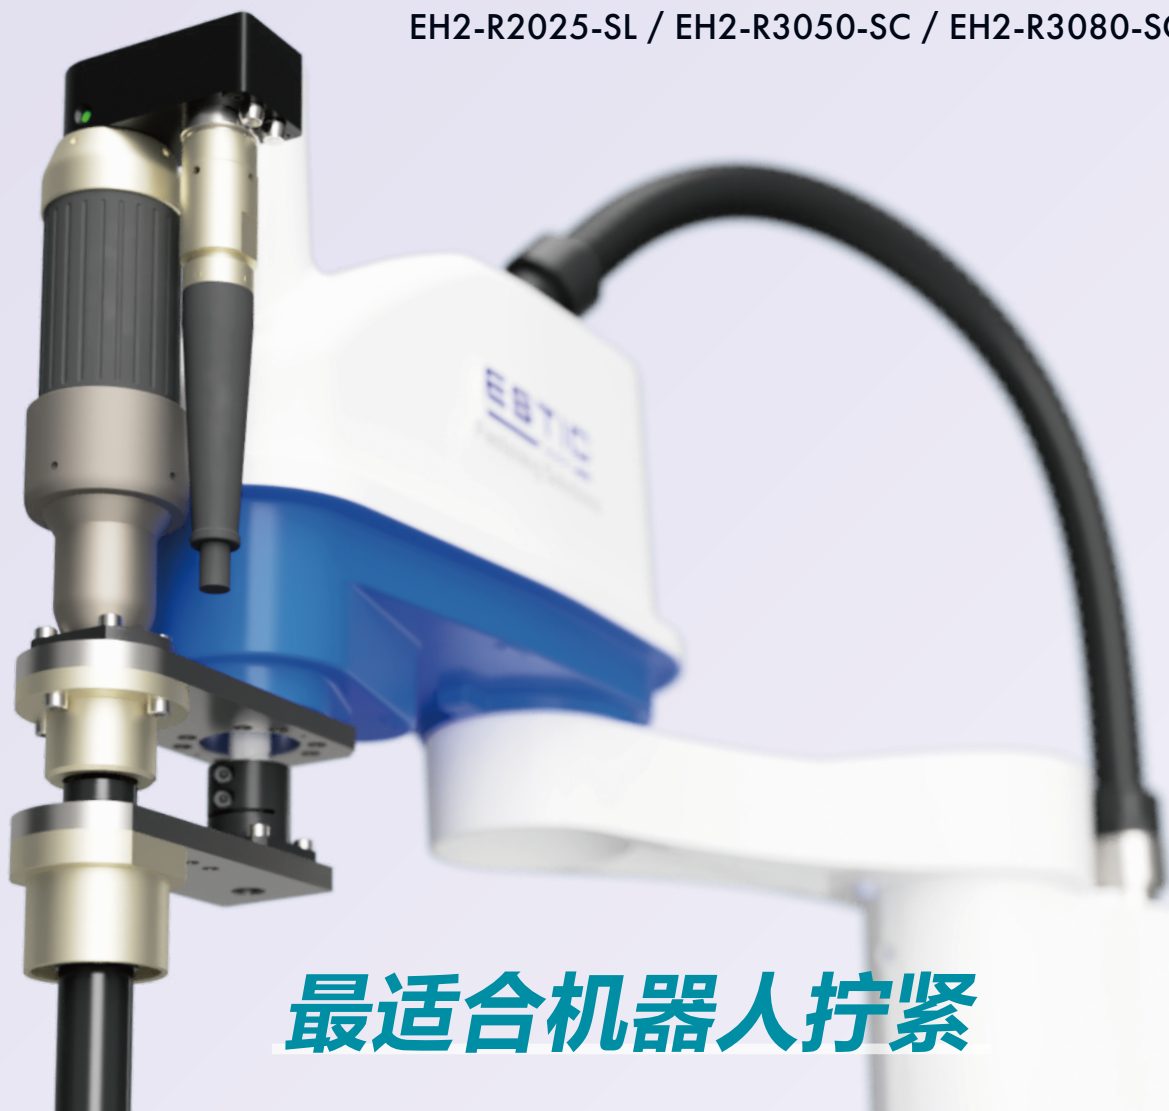

最适合机器人拧紧



SCARA机器人



协同机器人



选项

套筒更换装置



使用减缩
机构可以
缩短节拍

幅度为0.2 ~ 2.0 N·m的拧紧枪 (EH2-R4002-SC) 的登场,
可以覆盖更低的扭矩范围。



NEW

NEW!	型号	适用扭矩范围		适用扭矩范围								
		N·m	ft·lb	0.2	1.0	2.0	5.0	10.0	16.0	25.0	50.0	80.0 (N·m)
				0.1	0.7	1.5	3.7	7.4	11.8	18.4	36.9	59.0 (ft·lb)
	EH2-R4002-SC	0.2-2.0	0.1-1.5									
	EH2-R0005-SC	1.0-5.0	0.7-3.7									
	EH2-R0010-SC	2.0-10.0	1.5-7.4									
	EH2-R2025-SL	5.0-25.0	3.7-18.4									
	EH2-R3050-SC	10.0-50.0	7.4-36.9									
	EH2-R3080-SC	16.0-80.0	11.8-59.0									

可对应 0.2 N·m ~ 80 N·m !

工具一览

工具类型		型号	适用扭矩范围		最高转速 (rpm)		输出轴尺寸		重量		全长	
			N·m	ft·lb	AC200V供电时	AC100V供电时	mm	in	kg	lb	mm	in
直动工具	直式工具	EH2-R4002-SC	0.2-2.0	0.1-1.5	2543	1695	Hex 6.35	1/4	1.0	2.21	224	8.8
		EH2-R2025-SL	5.0-25.0	3.7-18.4	2108	1405	9.5 sq	3/8	1.7	3.75	286	11.3
		EH2-R3050-SC	10.0-50.0	7.4-36.9	2430	810	12.7 sq	1/2	3.7	8.16	319	12.6
		EH2-R3080-SC	16.0-80.0	11.8-59.0	1580	526	12.7 sq	1/2	3.8	8.38	322	12.7
直动 & 脉冲工具	直式工具	EH2-R0005-SC	1.0-5.0	0.7-3.7	2543	1695	9.5sq	3/8	1.1	2.43	228	9.0
		EH2-R0010-SC	2.0-10.0	1.5-7.4	1415	943	9.5 sq	3/8	1.1	2.43	228	9.0

工具形状



EH2-R4002-SC
2 N·m



EH2-R0005-SC
5 N·m



EH2-R0010-SC
10 N·m



EH2-R2025-SL
25 N·m



EH2-R3050-SC
50 N·m



EH2-R3080-SC
80 N·m

对应控制器

Handy 2000 Lite plus / Touch

(控制器型号 Lite plus : EH2-HT45-000**** / Touch : EH2-HT50-000****)

- 工具外形图的CAD文件下载, 请参考以下链接
<https://www.estic-global.com/member/login>



- 控制器功能等详细资料, 请参考
Handy 2000 Series GENERAL CATALOG



ESTIC

ESTIC CORPORATION

1-2-16 Togodori, Moriguchi-city,
Osaka, 570-0041 Japan

上海艾斯迪克汽车装备制造有限公司 ecc@estic.cn

LinkedIn www.linkedin.com/company/estic-corporation



JP : www.estic.co.jp
EN : www.estic-global.com
CN : www.cn.estic-global.com

